



Tel : +86 15361692334

Email :admin@infinitylink-g.com

add:338, 3/F, Building 22, No. 777, Meili Road, Huayin District, Jinan City, Shandong P.R. China

<https://www.infinitylink-g.com/>





Level General Use  
Single Lock **001**



Level General Use  
Double Lock box **002**



Theodolite General  
Use box **TH01-a**



Total Station General  
Use box **TS01-a**



**NIKON** Total Station  
box



**TOPCON** GTS102/332  
Total Station box



**TOPCON** GM/ES/GTS200  
Total Station



**LEICA** TS02/06/09  
box



LEICA TS03/07  
TZ05/07/08/12 box



LEICA TS15/16 box



LEICA TM30/50 box



Prism Set box  
P01S



Prism Set box  
P02S



Prism Set box  
P03S



GNSS box



Soft Case for Prism  
Assembly with Sponge



Soft Case for **Prism**  
BigPlate with Sponge



Soft Case for L  
Bar **Mini Prism**



Soft Case for MP061  
**Mini Prism**



Soft Case for SP066  
**Mini Prism**



Soft Case for **Tribrach**  
and **Adapter**



Soft Case for **Tribrach**  
and **Adapter**



Soft Case for C14/15B  
**Prism** Assembly



Soft Case for Z14/15U  
**Prism** Assembly



Soft Case for Z14/15BS  
**Prism** Assembly



Soft Case for Z14/15TB  
**Prism** Assembly



Soft Case for **Prism**  
Assembly with Sponge



Soft Case for **Prism**  
Set



Soft Case for **GNSS**



Soft Case for **GNSS**



Soft Case for **TR GNSS**  
Antenna



Soft Case for Z14/15U  
**Prism** Assembly



Soft Case with Rigid Frame  
for **TR Modular Receiver**



Soft Case for **TR Data Collector**



Soft Case for  
**Spray Can**



Soft Case for Swiss  
**Total Station SB01**



Soft Case for  
**Total Station**



Soft Case for **GNSS**



Soft Case for  
**GPS Pole**



Soft Case for Swiss  
**Total Station SB02**



**C15B-YY**

Prism Assembly  
Offset 0/-30mm C



**C15B-RR**

Prism Assembly  
Offset 0/-30mm



**Z15B-YW**

Prism Assembly  
Offset 0/-30mm



**Z15B-YY**

Prism Assembly  
Offset 0/-30mm



**Z15B-RW**

Prism Assembly  
Offset 0/-30mm



**Z15B-RY**

AL1T  
5/8"-11 Thread Adapter



**Z15U-YY**

Prism Assembly  
Offset 0/-30mm



**Z15U-RO**

Prism Assembly  
Offset 0/-30mm



**Z15UB-YY**

Prism Assembly  
Offset 0/-30mm



**Z15UB-RO**

Prism Assembly  
Offset 0/-30mm



**Z15UB-RR**

Prism Assembly  
Offset 0/-30mm



**Z15TB**

Prism Assembly  
Offset 0/-30mm



**Z15BS-RG**

Prism Assembly  
Offset 0/-30mm



**Z15BS-RR**

AL1T  
5/8"-11 Thread Adapter



**Z15UD-YB**

Prism Assembly  
Offset 0/-30mm



**Z15UD-RR**

Prism Assembly  
Offset 0/-30mm





**C34B-YY**

Triple Prism Assembly  
Offset 0/-30mm



**C34B-RR**

Triple Prism Assembly  
Offset 0/-30mm



**C34B-YY**

Prism Assembly  
Offset 0/-30mm



**C34B-RR**

Prism Assembly  
Offset 0/-30mm



**Z14B-YW**

Prism Assembly  
Offset 0/-30mm



**Z14B-YY**

Prism Assembly  
Offset 0/-30mm



**Z14U-YY**

Prism Assembly  
Offset 0/-30mm



**Z14U-RO**

Prism Assembly  
Offset 0/-30mm



**Z14UB-YY**

Prism Assembly  
Offset 0/-30mm



**Z14UB-RO**

Prism Assembly  
Offset 0/-30mm



**Z14UC-YY**

Prism Assembly Wide  
Target Offset 0/-30mm



**Z14UC-YG**

Prism Assembly Wide  
Target Offset 0/-30mm



**Z14UE-BY**

SE Prism Wide Target  
Offset 0/-30mm



**Z14UE-BR**

SE Prism Wide Target  
Offset 0/-30mm



**Z14BS-RG**

Prism Assembly  
Offset 0/-30mm



**Z14BS-RR**

Prism Assembly  
Offset 0/-30mm



**Z14TB**

TP Prism Assembly  
Offset 0mm



**Z14PT**

PX Prism Assembly  
Offset -30mm



**Z14SK-YY**

SK Prism Assembly  
Offset 0/-30mm



**Z14SK-RR**

SK Prism Assembly  
Offset 0/-30mm



**Z14UE-BY**

TR Prism  
Assembly Offset -35mm



**Z14UE-BR**

TR Prism  
Assembly Offset -35mm



**Z14BS-RG**

Swiss Prism Assembly  
Constant 0mm



**GPH1A**

Swiss Prism Assembly  
Constant 0mm



**GPH1**

Swiss Prism Assembly  
Offset 0mm



**GPR111**

Swiss Prism Assembly  
Offset 0mm




**GPR121**

Swiss Prism Assembly  
Offset 0mm



**GPH3**

Swiss Triple Prism  
Offset 0mm

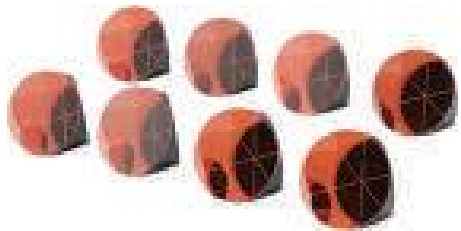

**G254**

Prism Glass 25.4mm




**G381**

Prism Glass 38.1mm



**G640T**

Prism Glass 64.0mm

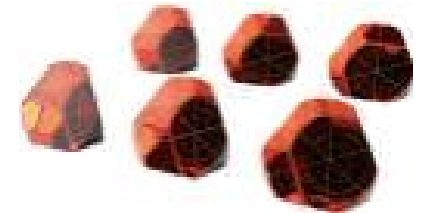

**G640L**

Prism Glass 64.0mm



**PA127**

Corner Prism 12.7mm



**PA254**

Prism 25.4mm



**PB254**

Prism 25.4mm



**PC254**

Prism 25.4mm



**PD254**

Prism 25.4mm



**PE254**

Prism 25.4mm



**PF254**

Prism 25.4mm



**PG254**

Prism 25.4mm



**PH254**

Prism 25.4mm



**PI254**

Prism 25.4mm



**PA381**

TP Prism 38.1mm



**PB381**

Prism 38.1mm



**PC381**

Prism 38.1mm



**PA550**

TR Prism 55.0mm



**GPR112**

Swiss Prism 62.0mm



**PJ640B**

Metal Shell Prism  
64.0mm

*Metal*



**PA640Y**

Prism 64.0mm



**PA640R**

Prism 64.0mm



**PB640Y**

Prism 64.0mm



**PB640R**

Prism 64.0mm



**PB640YL**

Prism with Light  
64.0mm



**PB640RL**

Prism with Light  
64.0mm



**PC640R**

SK Prism 64.0mm



**PD640Y**

SK Prism 64.0mm



**PE640B**

Rubber Mat Prism  
64.0mm



**PF640R**

Waterproof Prism  
64.0mm



**GPR1**

Swiss Prism 64.0mm



**GPR1L**

Prism with Light  
64.0mm



- Prism Diameter: 25.4mm
- Copper Coated, Hermetically Sealed
- Prism has Ability to Swivel 360°
- Light-weight, Wide Aluminum Plate Suits Epoxy Bonding
- Option to Remove Prism if flange is Damaged During Removal



- Prism Diameter: 25.4mm
- Copper Coated



## MP090 Mini Prism



- Copper or Silver Coating
- A Rotatable and Tiltable Prism for Ground Monitoring Tasks
- With Side Lock
- Aluminium Housing
- Base Plate 35 x 38mm
- Diameter of Fixing Holes 3.5mm
- Distance of Fixing Holes Center 10mm

### **Model No.:**

MP090A: Diameter: 12.7mm

MP090B: Diameter: 25.4mm

## MP091 Mini Prism



- Copper or Silver Coating
- A Rotatable and Tiltable Prism for Ground Monitoring Tasks
- Aluminium Housing with Snow and Rain Cover
- Base Plate 40 x 40mm
- Diameter of Fixing Holes 3mm

### **Model No.:**

MP091A: Diameter 25.4mm

MP091B: Diameter 35.0mm



MP092B

- Adjustable a Direction of Prism in X and Y Axis Easily
- Water Resistance Structure

### **Model No.:**

MP092A: Prism Diameter 25.4mm

MP092B: Prism Diameter 38.1mm



MP092A



- Prism Diameter: 64mm
- Copper Coating
- Prism Height: 48mm

## MP093 Mini Prism

## SE6603-05 SE Monitoring Prism



- Prism Diameter: 62mm
- Mounting Arm Tilt up to 240°, Prism Mount 360° Rotation
- Mounting Holes OD 0.328" ( 8.3mm )
- Prism Mounting Holes 1.75" (44.4mm) Apart
- Included Rain Hood

## MP104 Mini Prism



- Prism Diameter: 25.4mm
- Copper or Silver Coating
- Prism Offset: 17.5mm
- Feature with Adapter

### **Model No.:**

MP104-A01: Prism With Adapter Thread 5/8"  
MP104-A02: Prism With Adapter Thread 3/8"  
MP104-A03: Prism With Adapter Thread M8

## TRM01 TR Monitoring Prism



- Prism Diameter: 62mm
- Prism Offset: -40mm
- With GNSS Antenna Mount
- Combine GNSS Antenna with a Prism for Integrated Monitoring



- Prism Diameter: 62mm
- Prism offset: -40mm
- Ability to Pivot in Two Axes, Stainless Steel Locking
- M20 Screw-in Type Prism Canister with Stainless Steel Locking
- Flat Bottom of the L-Bracket is a Large 2.3 x 3.4" with Five Holes
- 3/8-in (9.5mm) Center Pivot Hole, with Four OD 11/64" (4.5mm) Screw Holes
- Rain Hood Keep Prism Clean to Ensure Long-term Measuring

## TRM02 TR Large Monitoring Prism

## MP105 Mini Prism



- Copper or Silver Coating
- Feature with Adapter
- MP105A: Diameter 25.4mm
- MP105B: Diameter 38.1mm

### **Model No.:**

MP105A-A01: Prism With Adapter Thread 5/8"  
MP105A-A02: Prism With Adapter Thread 3/8"  
MP105A-A03: Prism With Adapter Thread M8  
MP105B-A01: Prism With Adapter Thread 5/8"  
MP105B-A02: Prism With Adapter Thread 3/8"  
MP105B-A03: Prism With Adapter Thread M8

## MP095 Mini Prism



- Prism Diameter: 12.7mm
- Copper or Silver Coating
- Base Diameter: 80mm
- Base Material: Nylon

### **Model No.:**

MP095SM: Single Mini Prism, Glass in the Middle  
MP095SS: Single Mini Prism, Glass in the Side  
MP095D: Double Mini Prism

## MP109 Angled Mini Prism



- Prism Diameter: 12.7mm
- Copper or Silver Coating
- Size: 100 x 35 x 30mm Height

### **Model No.:**

MP109S: Single Mini Prism  
MP109D: Double Mini Prism



- Prism Diameter: 12.7mm
- Copper or Silver Coating
- Plastic Hoder OD: 145mm
- Height of Pavement: 20mm
- Vertical Inclination of 10 Degree

## MP111 Plastic Road Prism

## MP112 Metal Road Prism



- Prism Diameter: 17.5mm
- Prism Height: 13.5mm
- Die-cast Aluminum Body
- Vertical Inclination of 20 Degree
- Size: 100 x 100 x 23mm

## RAP001 Right Angle Prism



- Measures 90 Degree Angles
- Plumb Bob Cord Slot
- Plastic Construction
- Leather Belt Loop Case

## RAP002 Double Right Angle Prism



- Measures 90 and 180 Degree Angles
- 2 Prisms for Left and Right Sight
- Large Center Lens
- Plumb Bob Cord Slot
- Metal Construction
- Leather Belt Loop Case



- Measures 90 and 180 Degree Angles
- 2 Prisms for Left and Right Sight
- Large Center Lens
- Plumb Bob Cord Slot
- Metal Construction
- Leather Belt Loop Case

## RAP003 Double Right Angle Prism

## BP001 Ball Prism with Magnetic Base



- Copper or Silver Coating
  - Magnetic Base Diameter: 35mm
- Model No.:
- BP001A: Prism OD17.8mm, Ball OD 30.0mm
  - BP001B: Prism OD25.4mm, Ball OD 38.1mm

## BP002 Ball Prism with Magnetic Base



- Copper or Silver Coating
  - Magnetic Base Diameter: 40mm
- Model No.:**
- BP002A: Prism OD17.8mm, Ball OD 30.0mm
  - BP002B: Prism OD 25.4mm, Ball OD38.1mm
  - BP002C: Prism OD 25.4mm, Ball OD45.0mm

## BP003 Ball Prism



- Prism Diameter: 17.8mm
- Ball Diameter: 30mm
- Magnetic Base Diameter: 35mm



BP004A

BP004B

## BP004 Ball Prism

- Measures 90 and 180 Degree Angles
- 2 Prisms for Left and Right Sight
- Large Center Lens
- Plumb Bob Cord Slot
- Metal Construction
- Leather Belt Loop Case

### MP110S Mini Prism



- Mini Corner Cube Prism
- Copper or Silver Coating
- Prism Diameter: 12.7mm
- Operates on Two Axis
- Machined Anodized Aluminum Body

### MP110T TR Mini Prism



- TR System L Bar Monitoring Prism
- Copper or Silver Coating
- Prism Diameter: 25.4mm
- Machined Anodized Aluminum Body

### MP110B Mini Prism



- L Bar Monitoring Prism
- Prism Diameter: 38.1mm
- Copper or Silver Coating
- Machined Anodized Aluminum Body



- L Bar Monitoring Prism
- Copper or Silver Coating
- Prism Diameter: 25.4mm
- Machined Anodized Aluminum Body
- Removable Back Cover

### MP110R Mini Prism

## MP110D Double Side Mini Prism




- Double-Side L Bar Monitoring Prism
- Copper or Silver Coating
- Prism Diameter: 25.4mm
- Machined Anodized Aluminum Body

## MP110T TR Mini Prism



- L Bar Monitoring Prism
- Copper or Silver Coating
- Prism Diameter: 25.4mm
- Die-cast Aluminum Body



## MP110H Mini Prism



- L Bar Monitoring Prism
- Copper or Silver Coating
- Prism Diameter: 25.4mm
- Machined Anodized Aluminum Body, High Quality Style (H)



- L Bar Monitoring Prism
  - Copper or Silver Coating
  - Prism Diameter: 25.4mm
  - With Waterproof Ring (W)
- MP110W: Die-cast Aluminum Body

**Model No.:**  
MP110HW: Machined Anodized Aluminum Body, High Quality Style (H)

## MP110W/ MP110HW Mini Prism

## MP110V/ MP110HV Mini Prism



- L Bar Monitoring Prism
- Copper or Silver Coating
- Prism Diameter: 25.4mm
- Includes Visibility Ring (V)

### **Model No.:**

MP110V: Die-cast Aluminum Body

MP110HV: Machined Anodized Aluminum Body, High Quality Style (H)

## MP110C/ MP110HC Mini Prism



- L Bar Monitoring Prism
- Copper or Silver Coating
- Prism Diameter: 25.4mm
- Includes Waterproof Cap (C)

### **Model No.:**

MP110C: Die-cast Aluminum Body

MP110HC: Machined Anodized Aluminum Body, High Quality Style (H)

## MP108 Mini Prism



MP108A

- L Bar Monitoring Prism
- Copper or Silver Coating
- Prism Diameter: 25.4mm
- Machined Anodized Aluminum Body, High Quality Style (H)



MP108B



- Prism Diameter: 62mm
- Large Diameter Monitoring Prism Set for Long Range Measurements
- For Installation on M8 or 5/8" Threaded Bolts
- Prism can be Adjusted and Fixed on Both Axes
- Built-in Filter Prevents Condensation on the Backside of the Prism
- Rain/snow Cover Available

## GPR112S Swiss Monitoring Prism Set



## MP062 Mini Prism



- Prism Diameter: 25.4mm
- Copper or Silver Coating
- Offset: 0/-30mm
- With 5/8"-11 Female Adapter
- With Nonferrous Anodized Aluminum Body
- Equipped with Side Bubble Level

### **For Option :**

MPT03 or MPT04 Mini Prism Tribrach

## GMP101 Swiss Mini Prism



- Prism Diameter: 25.4mm
- Copper or Silver Coating
- Offset: +17.5mm
- With Die Casting Aluminum Body

## MP061B Mini Prism



MP061BM

- Prism Diameter: 25.4mm
- Copper or Silver Coating
- Prism Offset: 0/-30mm
- With Nonferrous Anodized Aluminum Body



MP061BS

### **For Option :**

MPT03 or MPT04 Mini Prism Tribrach



MP061AM



MP061AS

- Prism Diameter: 25.4mm
- Copper or Silver Coating
- Prism Offset: 0/-30mm
- With 5/8"-11 Female Adapter
- With Nonferrous Anodized Aluminum Body

### **Model No.:**

MP061AM: Middle Vial  
MP061AS: Side Vial

### **For Option :**

MPT03 or MPT04 Mini Prism Tribrach

## MP061A Mini Prism

## MP062 Mini Prism



- Prism Diameter: 25.4mm
- Copper or Silver-Coating
- Offset: 0mm
- Machined Anodized Aluminum Body
- Side Cones as Double Lock
- Featured with Hook, Corner Adapter
- Steel Pin Pole, M6 Thread, OD9mm
- 600mm x 3 Sections, Extend to 1.8m(SP096003)
- Standard Packed with Soft Bag

### **For Option :**

MPT05 Mini Prism Tribrach  
Aluminum Tube for Pin Pole

## SP061 Mini Prism with Pole



- Prism Diameter: 25.4mm
- Copper or Silver-Coating • Prism Offset: 0/-30mm
- With Nonferrous Anodized Aluminum Body
- Featured with Plumb Bob Bracket and S-hook
- With a Point for Stake-out Work
- Aluminum Pin Pole, 1/4"-20 Thread, OD12mm
- 300mm x 4 Sections, Extend to 1.2m(AP123004)
- Standard Packed with Soft Bag  
Aluminum Tube for Pin Pole

## SP063 Mini Prism with Pole

SP063A SP063B SP063C



- Prism Diameter: 25.4mm
  - Material: High-strength Nylon
  - Aluminum Pole, 1/4"-20 Thread, OD12mm
  - 300mm x 4 Sections, Extend to 1.2m( AP123004)
  - Standard Packed with Soft Bag
- Model No.:
- SP063A: Offset 0mm, Copper-Coating, Swiss System  
SP063B: Offset 17.5mm, Copper-Coating, Swiss System  
SP063C: Offset 0/-30mm, Copper-Coating, Non-Swiss

with MPT02



- Prism Diameter: 25.4mm
- Material: High-strength Nylon
- Aluminum Pole, 1/4"-20 Thread, OD12mm
- 300mm x 4 Sections, Extend to 1.2m ( AP123004)
- Standard Packed with Carton

## GMP111 Mini Prism with Pole

## SP066 Mini Prism with Pole



- Prism Diameter: 38.1mm
- Silver-Coating
- Prism Offset: 0/30mm
- With Corner Adapter for Corner Use
- Adapter with Male 1/4"-20 and Female 5/8"-11 Thread for Prism Pole Use
- With Adapter for Handle Using
- Aluminum Pin Pole, 1/4"-20 Thread, OD12mm
- 300mm x 5 Sections, Extend to 1.5

## SP069 Mini Prism with Pole



with MPT01

- Prism Diameter: 38.1mm • Silver-Coating
- Prism Offset: 0/30mm
- With Adapter for Corner Use and Handle Using
- Adapter with Male M6 and Female 5/8"-11 Thread
- Stainless Steel Pin Pole, M6 Thread, OD9mm
- Standard Packed with Soft Bag

## SP067 Sliding Prim with Pole



- Prism Diameter: 25.4mm
- Silver-Coating • Prism Offset: 0/-30mm
- With Nonferrous Anodized Aluminum Body
- Features a Rear Locking System to Adjust Height
- The Vertical Angle Site Cones as Double Locks, one for the Height and the Other for the Tilt
- Bubble Level on Top and Bottom of the Prism holder
- Include a Adapter 5/8"-11 Thread, Fit for Prism Pole and Tribrach
- Aluminum Rod, 1/4"-20 Thread, OD12mm
- 300mm x 4, Extend to 1.2m
- Standard Packed with Soft Bag



- Prism Diameter: 25.4mm
- Copper-Coating
- Prism Offset: 0/-30mm
- With Nonferrous Anodized Aluminum Body
- Aluminum Rod, 1/4"-20 Thread, OD12mm
- 305mm x 3 and 300mm x 1, Extend to 1.22m
- Equipped with Side Cones as Double Lock
- Include a Brass Adapter with 5/8"-11 Thread, Fit for Prism Pole and Tribrach
- With Soft Bag and Inner Box

## SP068 Sliding Prim with Pole

## SP065 Sliding Prism with Pole



- Prism Diameter: 38.1mm
- Silver-Coating • Prism Offset: 0mm
- With Corner Adapter for Corner Use
- Stainless Steel Pin Pole, M6 Thread, OD9mm
- Prism with Screw Lock(S)
- Prism with Screw Lock and Quick Release Lock(D)




with MPT05

## MG1000SPT TP sliding Prism with Pole



- Prism Diameter: 25.4mm
- Silver-Coating
- Can be used as Corner Prism
- Quick Release Button for Sliding Easily
- Prism Part Can Be Moved 180 Degree
- Stainless Steel Pin Pole, M6 Thread, OD9mm
- Standard Packed with Soft Bag

## M1500 TP Sliding Prism with Pole

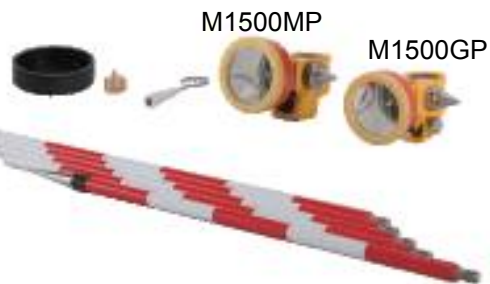

- Prism Diameter: 38.1mm • Silver-Coating
- Prism Offset: 0mm
- With Corner Adapter for Corner Use
- Stainless Steel Pin Pole, M6 Thread, OD9mm
- Standard Packed with Soft Bag
- Prism with Pole, Screw Lock (M1500MP)



- Prism Diameter: 38.1mm • Silver-Coating
- Prism Offset: 0/-30mm
- With Corner Adapter for Corner Use
- Adapter with Male M6 and Female 5/8"-11 Thread for Prism Pole Use
- With Adapter for Handle Using
- Stainless Steel Pin Pole, M6 Thread, OD9mm
- Standard Packed with Soft Bag

## MG1500SL TP Mini Prism with Pole

## GRZ4 360° Prism



GRZ4-N



GRZ4-M

- Prism Assembly Consist of Six Mini Prism Glued Together
- Prism Constant: +23.1mm (Swiss Constant)
- Measurement Accuracy:  $\pm 2.0\text{mm}$
- Quick Release Push Button Connection

## GRZ122 360° Prism



GRZ122-N



GRZ122-M

- Prism Assembly Consist of Six Mini Prism Glued Together
- Prism Constant: +23.1mm(Swiss Constant)
- Measurement Accuracy:  $\pm 2.0\text{mm}$
- 5/8" -11 Thread at Top for Install Antenna
- Quick Release Push Button Connection

## MPR122 360°Prism



- Prism Assembly Consist of Six Mini Prisms Glued Together
- With Central Axis for Keeping Stable
- Prism Constant: +28.1mm (Swiss Constant)
- Measurement Accuracy:  $\pm 1.0\text{mm}$
- 5/8" -11 Thread at Top for Install Antenna
- 5/8"-11 Thread at Bottom for Quick Release Adapter
- Quick Release Push Button Connection
- Metal Design)



- Prism Assembly Consist of Six Mini Prisms Glued Together
- Orange Rubber for Falling Protection
- Prism Constant: +23.1mm (Swiss Constant)
- Measurement Accuracy:  $\pm 1.5\text{mm}$
- 5/8" -11 Thread at Top for Install Antenna
- Quick Release Push Button Connection.
- Metal Design

## GX360 360°Prism

## GRZ101S/101 360° Prism



- Prism Assembly Consist of Six Mini Prism Glued Together
- Prism Constant: +30 mm (Swiss Constant)
- Aluminum Pole, 1/4"-20 Thread, OD12mm
- 300mm x 4 Sections, Extend to 1.2m (AP123004)
- Pointing Accuracy:  $\pm 1.5\text{mm}$
- Circular Vial 8'

## GRZ4S 360° Prism



- Prism Assembly Consist of Six Mini Prisms Glued Together
- Prism Constant: +23.1mm(Swiss Constant)
- 5/8" -11 Thread at Top for Install Antenna
- Quick Release Push Button Connection
- Metal Design

## SE5910-24 360° Sliding Prism



- OD 9mm Solid Steel Pin Poles, Graduated in cm
- Pole Have cm Grooves that the Ball-Detent in the Prism Assembly will Automatically Center On
- Replaceable Stainless Steel Point
- Prism Assembly Consist of Seven OD12.7mm, Silver-Coated Prisms
- Prism Offset: +2mm
- Adjustable Circular vial is 40'



- Featuring Six 35mm Prisms
- Copper-coated for Moisture Prevention
- Prism Height: 135mm
- Prism Constant: 0mm
- Protective Urethane Bumper

## SE6401-00 360° Robotic Prism

## ATP1 360°Prism



ATP1-P

ATP1-M



ATP1-MR

- Featuring Six Accurate Prisms
- Prism Constant: -7mm.
- 5/8" Thread at Top and Bottom

## ATP2S 360°Prism



- Featuring Six Accurate Prisms
- Prism Constant: -7mm
- 5/8"-11 Thread for Mounting
- 20-inch Long Stainless Steel Pole
- Built-in Circular Bubble Level
- Easy Release-and-Hold Button Mechanism
- Rugged Rubberized Housing

## ATP3 360°Prism



- Prism Assembly Features Six 25.4mm Silver-Coating Prisms
- Prism Constant: 0mm
- Metal Frame
- Round Bubble Level



## Zero220P 360°Prism

- Built-in Rear Viewport to Check Rear Prism Height Accurately
- Metal Prism Holders
- Prism Offset: 0mm
- Adjustable Round Bubble Level, Circular Vial 40'
- Special Anti-Diffusion Coating

## A7 360° Prism



- Prism Constant: +2mm
- Prism Accuracy 3"
- Measurement Accuracy:  $\pm 1.0\text{mm}$
- High quality Corner Cube 6 Prisms
- 5/8 inch Adapter
- Mount Platform

## R-360MCG 360° Prism



- Replaceable Prisms, Each Prism is Independent and Non-glued
- Metal Frame
- With Core Axis for Keeping Stable
- Seamlessly Connected 6 Prisms Make Strong Beam Reflection
- Prism Constant: -5mm

## ST360 Sliding 360° Prism



- Featuring Six Accurate Prisms
- Prism Constant: 0mm
- OD 9mm Stainless Steel Pole
- Built-in Circular Bubble Level
- Metal Design



TR360A



TR360B

- Built-in Rear Viewport to Check Rear Prism Height Accurately
- Metal Prism Holders
- Prism Offset: 0mm
- Adjustable Round Bubble Level, Circular Vial 40'
- Special Anti-Diffusion Coating

## TR360 360° Prism



## A7 360° Prism



- Prism Constant: +2mm
- Prism Accuracy 3"
- Measurement Accuracy:  $\pm 1.0\text{mm}$
- High quality Corner Cube 6 Prisms
- 5/8 inch Adapter
- Mount Platform

## R-360MCG 360° Prism



- Replaceable Prisms, Each Prism is Independent and Non-glued
- Metal Frame
- With Core Axis for Keeping Stable
- Seamlessly Connected 6 Prisms Make Strong Beam Reflection
- Prism Constant: -5mm

## ST360 Sliding 360° Prism



- Featuring Six Accurate Prisms
- Prism Constant: 0mm
- OD 9mm Stainless Steel Pole
- Built-in Circular Bubble Level
- Metal Design



TR360A



TR360B

## TR360 360° Prism

- Built-in Rear Viewport to Check Rear Prism Height Accurately
- Metal Prism Holders
- Prism Offset: 0mm
- Adjustable Round Bubble Level, Circular Vial 40'
- Special Anti-Diffusion Coating



AL1X  
GPS Adapter 5/8"-11 Thread



AL1S  
5/8"-11 Thread Adapter



AL1TP  
5/8"-11 Thread Adapter



AL1HA  
3/8"-16 Thread Adapter



AL1H  
Adapter 5/8"-11 Thread



AL1T  
5/8"-11 Thread Adapter



L

5/8"-11 Thread  
Adapter for GPS



N

5/8"-11 Thread  
Adapter for GPS



TP-01  
without Optical Plummet



TP-01D  
with Optical Plummet



TP-01G  
without Optical Plummet



TP-01DG  
with Optical Plummet



FDJ01  
without Optical Plummet



FDJ01D  
with Optical Plummet



FDJ01L  
With Laser Plummet



TPT01  
without Optical Plummet



TPT01D  
with Optical Plummet



TRT01D  
with Optical Plummet



TRT01  
without Optical Plummet



GDF322  
with Optical Plummet



GDF321  
without Optical Plummet



GDF312  
with Optical Plummet



GDF311  
Without Optical Plummet



GDF122  
with Optical Plummet



GDF121  
without Optical Plummet



GDF22  
with Optical Plummet



GDF21  
without Optical Plummet



GAD103  
Mini Prism Adapter



GAD105  
Mini Prism Adapter



GDF312  
with Optical Plummet



GRT247  
5/8"-11 Threadt



GRT10



GRT144



GRT146



FDC01M



FDC01MG



GZR103



GZR2t



TRA01D



MPA01  
Mini Prism Adapter 5/8"-11 Thread



**MPA02**  
Mini Prism Adapter



**MPA03**  
Mini Prism Adapter



**MPA04**  
Mini Prism Adapter



**AD-L01**  
Stainless Steel Adapter  
Swiss and M10 Thread



**AD-L02**  
Stainless Steel Adapter  
Swiss and 1/4"-20 Thread



**AD-L03**  
Stainless Steel Adapter  
Swiss and M8 Thread



**AD-L04**  
Stainless Steel Adapter  
Swiss and 3/8"-24 Thread



**AD-L05**  
Stainless Steel Adapter  
Swiss and 5/8"-11 Thread



**AD-L06**

Stainless Steel Adapter  
Swiss and M8 Thread



**AD-L07**

Copper Adapter  
Swiss and M8 Thread



**AD-L08**

Aluminum Adapter  
Swiss and 5/8"-11 Thread



**AD-L09**

Stainless Steel Adapter  
Swiss and 5/8"-11 Thread



**AD-L10**

Stainless Steel Adapter  
Swiss and M8 Thread



**AD-S01**

Aluminum Adapter  
Dual 5/8"-11 Thread



**AD-S02**

Stainless Steel Adapter  
5/8"-11 and M8



**AD-S03**

Stainless Steel Adapter  
3/8"-19 and M8 Thread





**AD-S04**

Stainless Steel Adapter  
5/8"-11 and M8 Thread



**AD-S05**

Copper Adapter  
5/8"-11 and M8 Thread



**BC-01**

Galvanized Steel Beam  
Clamp M8 Thread, Width 0-23mm



**WA-40**

Wall Anchor M8 Thread H40mm



**CB-A22250**

Galvanized Steel Convergence Bolt  
Swiss Plug OD22mm, H250mm



**CB-B22250**

Galvanized Steel Convergence Bolt M8  
Thread, OD22mm, H250mm



**CB-C22250**

Galvanized Steel Convergence Bolt 5/8"-  
11 Thread, OD22mm, H250mm



**CB-D22250**

Galvanized Steel Convergence Bolt 3/8"-  
19 Thread, OD22mm, H250mm